
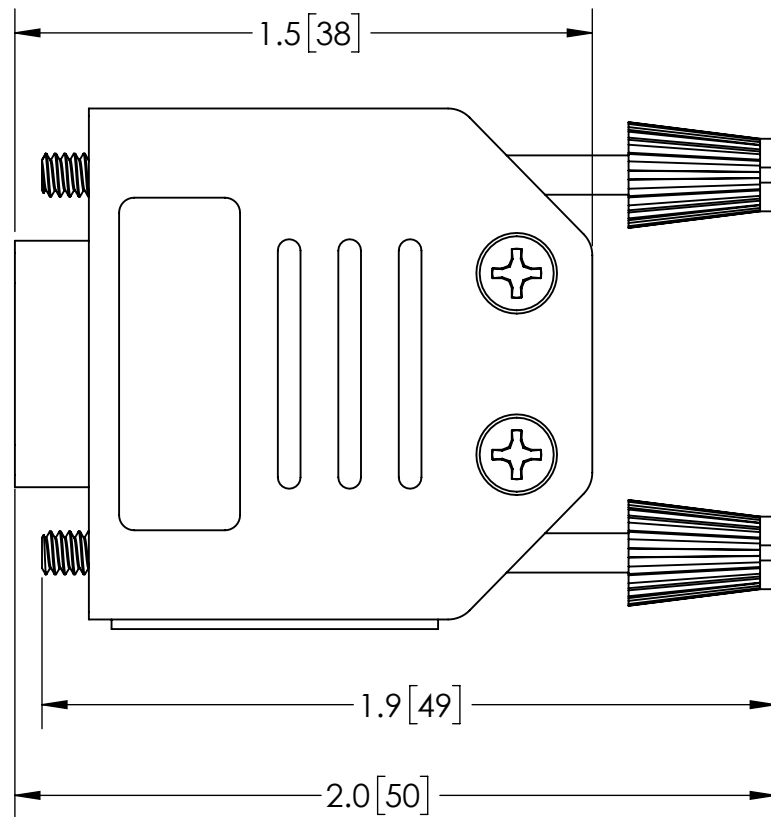


GOLD PLATED  
SOLDER CUP  
CONTACTS

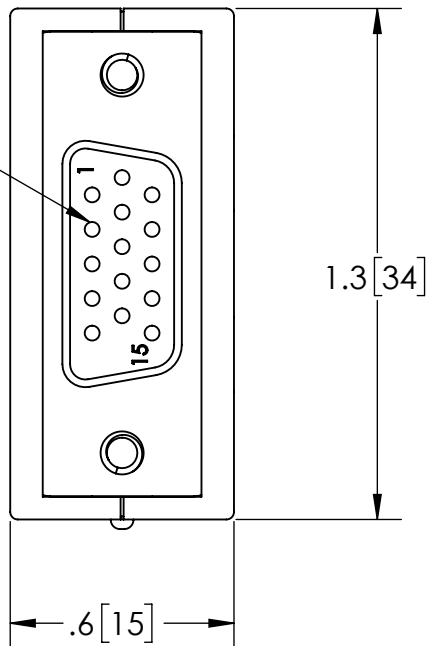

**SPECIFICATIONS:**  
 STEEL SHELL W/NICKEL & TIN PLATING  
 THERMOPLASTIC INSULATOR, RATED UL94V-0  
 BLACK PLASTIC HOOD- RATED UL94HB,  
 HINGED W 4-40 THREADED THUMBSCREWS

| PERFORMANCE SPECIFICATIONS |                |
|----------------------------|----------------|
| VOLTAGE:                   | 500V DC        |
| CURRENT:                   | 1 AMP          |
| TEMPERATURE:               | -55°C TO 105°C |

|  |       |            |            |                            |           |   |            |                         |                                 |
|--|-------|------------|------------|----------------------------|-----------|---|------------|-------------------------|---------------------------------|
| PROPRIETARY AND CONFIDENTIAL<br>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED. |       |            |            | THIRD ANGLE PROJECTION<br> |           | TITLE<br><b>15 PIN HD SUB-D AIR SIDE PLUG</b> |            |                         |                                 |
| REV.   | APP'D | DATE       | SCALE 2:1  | DIMENSIONS IN INCHES [mm]  | DRAWN     | JF  | 07/28/2021 | PART NO. KT42854 REV. A | WWW.SOLIDSEALING.COM            |
| A1   | JF    | 07/28/2021 | KT42854-11 |                            | ENG APPR. | JF  | 07/28/2021 |                         | SALES DWG NO. KT42854SL REV. A1 |

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**