INSTALLATION WELDING OPTIONS:

1- E.B. OR LASER WELDING 2- PULSED TIG WELDING

26482 CIRCULAR CONNECTORS WELDING INSTRUCTIONS

MATING HARDWARE DIMENSIONS/ CONFIGURATION:

SEE SHEET 2 OF THIS INSTRUCTION SHEET.
MATING HARDWARE SHOULD BE 304 OR 316 STAINLESS STEEL.
PREFERRED ORIENTATION IS WITH THE WELD ON THE VACUUM SIDE.

PULSED TIG WELD PROCEDURE:

1- TYPICAL WELDER SETTINGS:

BACKGROUND CURRENT: FIXED AT 1/2 OF PEAK CURRENT (eg. 10 AMPS BACKGROUND, 20 AMPS PEAK)

CURRENT SETTING: 20 TO 25 AMPS

PULSE FREQUENCY: 17.5 Hz PULSE WIDTH FIXED AT 42%


2- USE A HEATSINK ON BOTH SIDES.

3- TACK WELD IN ACCORDANCE WITH THE TABLE BELOW.

4- TIG WELD BETWEEN THE TACK WELDS AT A SPEED SUFFICIENT TO COMPLETE THE SEGMENT IN A TIME OF 3 TO 4 SECONDS. DO NOT EXCEED 4 SECONDS.

5- OPPOSITE SIDE OF HEADER SHOULD BE FLOODED WITH INERT GAS FOR EXTRA COOLING AND TO MINIMIZE OXIDATION.

6- BETWEEN SEGMENTS, FLOOD THE WELD WITH INERT GAS OR NITROGEN GAS FOR 10 SEC MIN, FOR EXTRA COOLING.

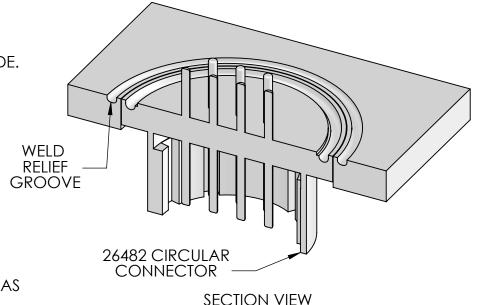

CONNECTOR # OF PINS:	3	6	10	19	32	41
DISTANCE BETWEEN TACK WELDS	1/2" - 5/8"	1/2" - 5/8"	1/2" - 5/8"	1/2" - 5/8"	1/2" - 5/8"	3/8" - 1/2"
# OF WELDS	4	5	6	6	7, 8	10-12

- SEE SHEET 2 FOR HOLE DIMENSIONS -

PROPRIETARY AND CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY, ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION

INSTRUCTION SHEET 26482 CIRCULAR WELDING

SOLID SEALING TECHNOLOGY

REV.	APP'D	DATE	SCALE 2.5:1	DIMENSIONS IN	DRAWN	JS	10/15/2008	NUMBER:	NIC10000	REV:	SHEET 1 OF 2
В	CW	7/22/2021	NSASM002-11X1	INCHES [mm]	ENG APPR.	OG	04/14/2009		NS13003	B	SHELLI OLZ

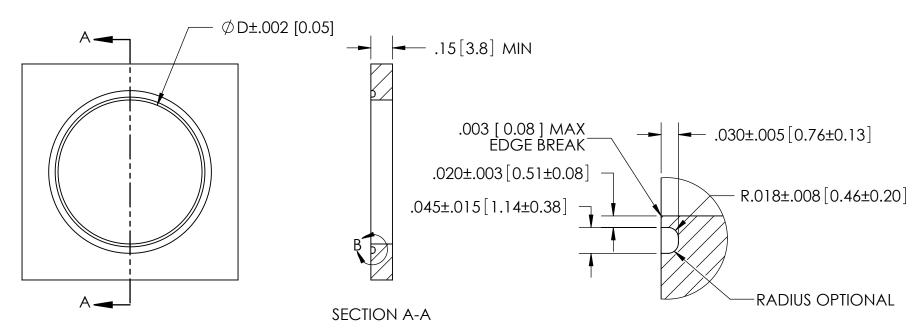

CONNECTOR PART NO.	CONNECTOR # OF PINS	ØD
FA16820, FA16822	3	.750 [19.05]
FA16808, FA16809	6	.875 [22.23]
FA13003, FA12933	10	1.000 [25.40]
FA13002, FA12932	19	1.125 [28.58]
FA13001, FA12931	32	1.375 [34.93]
FA12998, FA12930	41	1.500 [38.10]

DETAIL B SCALE 6:1

MIL-C-26482 CONNECTORS RECOMMENDED HOLE & WELD PREP DIMENSIONS

- SEE SHEET 1 FOR WELDING INSTRUCTIONS -

THIRD ANGLE TITLE: PROPRIETARY AND CONFIDENTIAL **INSTRUCTION SHEET PROJECTION** THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY 26482 CIRCULAR WELDING TECHNOLOGY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED REV: 10/15/2008 NUMBER: DATE **SCALE 1.5:1** DRAWN DIMENSIONS IN SHEET 2 OF 2 NS13003 В INCHES [mm] NSPRT002-11 ENG APPR. CW 7/22/2021 OG 04/14/2009